



**Industrial paint finishing Systems
Installations and Automations**


BELLOWS PUMP

Bellows pumps, pneumatic function, completely pumping part in stainless steel, newly developed pneumatic motor, reduced air consumption. Ideal for solvent-based polyester abrasive products. Various flow rates and different compression ratios.

CHARACTERISTICS

RATIOS	<i>From 4:1 to 50:1</i>
FLOW lit/min.	<i>From 9 to 24</i>
VOLUME FOR STROKE	<i>From 25 cc to 150 cc</i>
MAX. PRESSURE FLOW	<i>From 24 bar to 250 bar</i>

***New pneumatic motors
Reliable pumping parts***

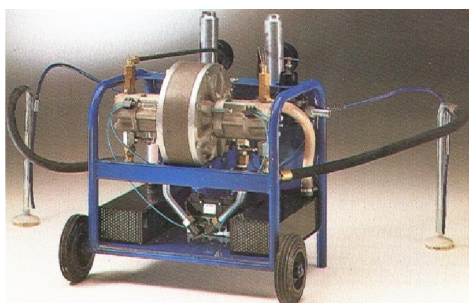

***Wide range of
flow
rates(Lt/min.)***

***Different outfits
for every need***



***Airless and
Air-mix
version***



***Qualified
Assistance***

WWW.CMSPRAY.IT

***CMSPRAY@CMSPRAY.IT
Tel. +39(0)422 398768
Fax +39(0)422 398594
Carbonera (TV) ITALY***